

Basler pylon



The pylon Driver Package – Capture More Than an Image

Description

The pylon driver package is designed to operate all Basler cameras that have an IEEE 1394a¹, an IEEE 1394b¹, or a GigE Vision² interface. You can select the interface with the best fit or use multiple interface technologies simultaneously in your application. The pylon driver offers reliable, real-time image data transport into the memory of your PC at a very low CPU load.

The integration of the interface technologies into your application is a one time only process. The unified C++ camera API of the pylon driver package lets you control Basler's IEEE1394 and Basler's GigE Vision cameras via the same commands. The internal architecture of pylon is based on GenICam³ standard, which offers you immediate access to the newest camera models and the latest camera features.

¹ see www.1394ta.org

² see www.machinevisiononline.org

³ see www.GenICam.org


Your benefits include:

- High bandwidth data transfer into the memory of your PC with a low CPU load
- Simultaneous GigE Vision, IEEE 1394a, and IEEE 1394b interface support
- Unified C++ camera API for all supported interfaces
- GenICam technology provides flexible support for new camera features
- A viewer for configuring your single or multiple camera setup and for capturing live images

The pylon GigE Vision Performance Driver quickly separates incoming packets carrying image data from other traffic on the network and needs only the lowest amount of CPU resources to make the data available for your vision applications. The performance driver can be used with specific Intel network adapter cards. The pylon GigE Vision Filter Driver supports many kinds of hardware including all common GigE network adapter cards and GigE ports on your mother board as well. The pylon IEEE 1394b driver gives you access to a well established interface technology, but with double the bandwidth of IEEE 1394a.

The pylon Viewer provides a versatile application for testing and evaluating Basler cameras. The new tree structure of the viewer's graphical user interface lets you easily find the best camera parameter setup, adjust image quality, and control advanced camera features.

Documentation and C++ sample programs for Visual Studio .NET will minimize your learning time for the pylon driver package.

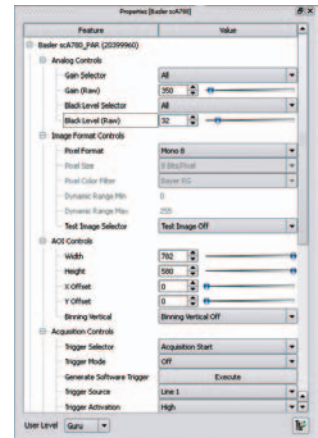

Components included in the pylon driver package:

- GigE Vision Filter Driver
- GigE Vision Performance Driver
- IEEE 1394a/1394b Driver
- pylon C++ Camera API
- pylon DirectX Interface
- pylon Viewer
- Source code samples and documentation

System requirements:

- Windows 2000 (SP4) or Windows XP (SP2)
- Gigabit Ethernet or IEEE 1394 support
- 150 MB RAM for the SDK
- CD-ROM drive



Germany, Headquarters
 Fon +49 4102 463 500
 Fax +49 4102 463 599
 vc.sales.europe@baslerweb.com

USA
 Fon +1 610 280 0171
 Fax +1 610 280 7608
 vc.sales.usa@baslerweb.com

Singapore
 Fon +65 6425 0472
 Fax +65 6425 0473
 vc.sales.asia@baslerweb.com